


The information contained in this drawing is the sole property of CWSTechnology, Inc. and its use without written permission of CWSTechnology, Inc. is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
B		PRE-PRODUCTION RELEASE	TKK	9/16/03	JLAW	9/16/03

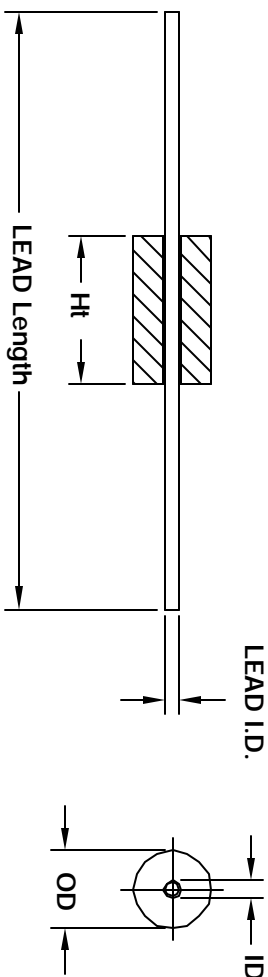

- 1 THE HP 41911A RF IMPEDANCE ANALYZER FOR 61 MATERIAL BEADS
 - 2 HP4193A VECTOR IMPEDANCE METER FOR BEADS IN 73 AND 43 MATERIAL AND FOR IMPEDANCE WITH A SINGLE TURN, USING A HEWLETT PACKARD
 - 3 BEADS ARE CONTROLLED FOR IMPEDANCE LIMITS ONLY. THEY ARE TESTED
 - 4 MAXIMUM FOR THE AWG WIRE AND 2.2 MHOM MAXIMUM FOR THE 20 AWG WIRE
- TIN/LEAD COATING. THE RESISTANCE OF THE WIRE IS 3.5 MOHM
WIRES ARE OXYGEN FREE HIGH CONDUCTIVITY COPPER WITH A
- TEMP. RATING: -55°C-125°C
DIELECTRIC = 500 Vrms AT 60 HZ
- SPECIFICATIONS:
- BOBBIN RATING CLASS B (130°C) REQUIRED
- 1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
- NOTES: UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED
DRAWING AND TOLERANCE PER ANSI Y14.5M
ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
TOLERANCE INCHES: ±.030
TOLERANCE METERS: ±.015
TOLERANCE METERS: ±.015
TOLERANCE METERS: ±.015
ANGLE PROJECTION
DO NOT SCALE DRAWING

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			PARTS LIST	
			CWSTechnology, INC.	
			1510 E. Edinger Ave, Unit B, Santa Ana, CA 92705	
			Beads on Leads	
			SIZE: B	REV: A
			SCALE: 4=1	SHEET: 1 OF 1