


The information contained in this drawing is the sole property of CWSTechnology, Inc. and its use without written permission of CWSTechnology, Inc. is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
B		PRE-PRODUCTION RELEASE	TKK	9/16/03	JLW	9/16/03

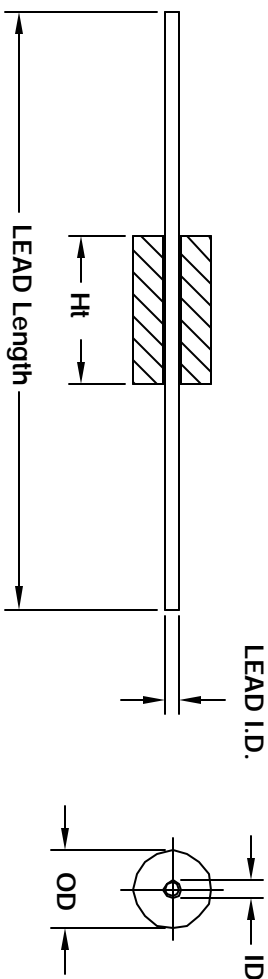

- THE HP 4191A RF IMPEDANCE ANALYZER FOR 61 MATERIAL BEADS
 HP4193A VECTOR IMPEDANCE METER FOR BEADS IN 73 AND 43 MATERIAL AND
 FOR IMPEDANCE WITH A SINGLE TURN, USING A HEWLETT PACKARD
 BEADS ARE CONTROLLED FOR IMPEDANCE LIMITS ONLY. THEY ARE TESTED
- 4
 MAXIMUM FOR THE AWG WIRE AND 2.2 MHOM MAXIMUM FOR THE 20 AWG WIRE
 TIN/LEAD COATING. THE RESISTANCE OF THE WIRE IS 3.5 MOHM
 WIRES ARE OXYGEN FREE HIGH CONDUCTIVITY COPPER WITH A
- 3
 TEMP. RATING: -55°C-125°C
 DIELECTRIC = 500 Vrms AT 60 HZ
- 2
 SPECIFICATIONS:
- 1
 BOBBIN RATING CLASS B (130°C) REQUIRED
 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
- NOTES: UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED
DRAWING AND TOLERANCE PER ANSI Y14.5M
ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
TOLERANCE INCHES: ±.030
TOLERANCE METERS: ±.015
TOLERANCE METERS: ±.015
TOLERANCE METERS: ±.015
ANGLE PROJECTION
DO NOT SCALE DRAWING

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			PARTS LIST	
			CWSTechnology, INC.	
			1510 E. Edinger Ave, Unit B, Santa Ana, CA 92705	
			Beads on Leads	
			SIZE: B	REV: A
			SCALE: 4=1	SHEET: 1 OF 1