The information contained in this drawing is the sole property of Coil Winding Specialist Inc (CWS). Any reproduction in part or whole without written permission of CWS is prohibited.

R-050200-33

Features


Ferrite rods, bars, slugs, plates and tubes are primarily used as magnetic cores in radio antennas, chokes, inductors and filters. In radio antennas, ferrite rods are useful within the VLF spectrum to the VHF spectrum. Advantages are the small size, high Q and compactness carried.

Material 33 can be used at frequencies lower than 3 MHz for inductors, antennas and other open circuit applications.

Electrical Specifications								
Item	Unit/Symbol	Condition	Value	Tol.				
A_L	mh/1000t	@465 Ampere turns	51	± 20%				
Density	g/cm ³	N/A	4.8	Тур.				
Initial Permeability	μ_0	Frequency = 10kHz, B<10 Gauss	600	± 20%				
Temp. Coeff. Of initial Permeability	%, °C	20 - 70 °C	≤ 0.1	Тур.				
Saturation Flux Density	Gauss, B	Initial (B), oersted	2800	Тур.				
	Gauss, H	@Field Strength (H), oersted	5	Тур.				
Coercive Force	Hc	oersted	0.6	Тур.				
Residual Flux Density	Br	Gauss	1200	Тур.				
Curie temperature	°C	T _c	≥ 150	Nom.				
Volume Resistivity	Ω -cm, ρ	N/A	10 ²	Тур.				
Loss Factor	10^{-6} , $tan\delta / \mu$	@ Frequency = 0.2 MHz, B=1 Gauss	< 25	Тур.				
Recommended freq. MHz		Frequency	0.01-400	Тур.				

Dimensional Tolerances							
	in	tol.	mm	tol.			
B (Outer Diameter)	0.500	± 5%	12.70	± 5%			
LH (Length)	2.000	± 2%	50.80	± 2%			
Approximate Weight 30.89 g							

	REVISION HISTORY								
REV ECN	DESCRIPTION	SIGN & DATE							
KEV	ECN	DESCRIPTION	BY	DATE	AP.	DATE			
A		Production release	ЕО	6/4/13	JL	6/4/13			

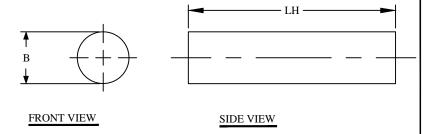

For additional detail, specifications and charts see:

http://www.bytemark.com/products/rod_new.html http://www.bytemark.com/products/rod_customblocks.html

	CODE MFG		G. P/N			DESCRIPTION		ITEM NO.	
						PARTS	LIST		
	AUTOCAD X			C			CW	SBYTEMARK	
	SOLIDY	VORKS		www.coilws.com		353 West Grove Ave. Ora			
UNLESS OTHERWISE SPECIFIED	SIGN		DATE	www.cwsbytemark.com		92865		ige, CA.	
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M	DRAWN	ЕО	6/4/13	TITLE:					
ALL DIMENSIONS ARE IN INCHES AND [MILIMETERS].	CHECKED	JL	6/4/13	Ferrite Rod Material 33, Mn2				'n	
TOLERANCE INCHES: .XXX=±.005 .XX=±.015 ≪=±0'30' TOLERANCE METRICS:	ENGR.	JL	6/4/13	CITE	DWG. NO.				REV
.XXX=±.127 .XX=±.38 =±0'30' ANGLE PROJECTION ⊕ -</th <th>APPR.</th> <th>JL</th> <th>6/4/13</th> <th>В</th> <th>DWG. NO.</th> <th colspan="3">R-050200-33</th> <th>A</th>	APPR.	JL	6/4/13	В	DWG. NO.	R-050200-33			A
DO NOT SCALE DRAWING				SCALE N/A SHEET 1 O			F 1		
						0.4.5. 511	_		

EP FORM0005 REV 3 10/01 CAD-FILE: