

The information contained in this drawing is the sole property of Coil Winding Specialist Inc (CWS). Any reproduction in part or whole without written permission of CWS is prohibited.

T20-8 or T20-8/90


Features

Low core loss and good results of linearity through high bias administration.
Applicable (at ≥50kHz) for Power Factor Correction Chokes, DC Chokes and higher Et/N.

Electrical Specifications

| Item | Unit/Symbol | Condition | Value | Tol. |
|-----------------------------|--------------------------------------------|---------------------------------------------|----------|-------|
| A _L | nH/N ² | AC flux density of 10 gauss (1 mT) @ 10 kHz | 7.8 | ± 10% |
| L _e | cm | N/A | 1.15 | Typ. |
| A _e | cm ² | N/A | 0.023 | Typ. |
| V _e | cm ³ | N/A | 0.026 | Typ. |
| Density | g/cm ³ | N/A | 6.5 | Typ. |
| Permeability | μ ₀ | N/A | 35 | ± 10% |
| Permeability with DC BIAS | %μ ₀ , μ ₀ effective | HDC = 50 Oersted | 91, 31.9 | Typ. |
| Temp. Coef. of Permeability | +ppm/°C | N/A | 255 | Typ. |
| Coef. of Lin. Expansion | +ppm/°C | N/A | 10 | Typ. |
| Thermal Conductivity | mW/cm-°C | N/A | 29 | Typ. |

| REVISION HISTORY | | | | | | |
|------------------|-----|--------------------|-------------|--------|-----|--------|
| REV | ECN | DESCRIPTION | SIGN & DATE | | | |
| | | | BY | DATE | AP. | DATE |
| A | | Production release | EO | 3/7/13 | JL | 3/7/13 |
| | | | | | | |

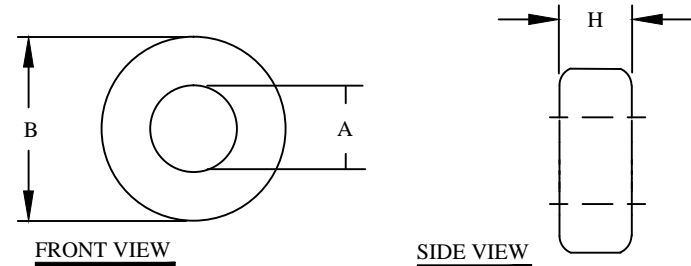

| Case Dimensional Tolerances | | | | |
|-----------------------------|-------|-------|------|------|
| | in | tol. | mm | tol. |
| B (Outer Diameter) | 0.200 | 0.010 | 5.08 | 0.25 |
| A (Inner Diameter) | 0.088 | 0.010 | 2.24 | 0.25 |
| H (Height) | 0.070 | 0.010 | 1.78 | 0.25 |
| Weight 0.17 g | | | | |

$$\text{Temperature Rise } \Delta T(^{\circ}\text{C}) = \left[\frac{\text{Total Power Dissipation (milliwatts)}}{\text{Surface Area (cm}^2\text{)}} \right]^{0.833}$$

$$\text{Required turns} = \left[\frac{\text{desired L (nH)}}{A_L \left(\frac{\text{nH}}{\text{N}^2} \right)} \right]^{\frac{1}{2}}$$

$$\text{Peak AC Flux Density: } B_{pk} = \frac{E_{avg} 10^8}{4ANf}$$

$$\text{Magnetizing Force: } H = \frac{0.4\pi NI}{\ell}$$

L = inductance
nH = nanohenries
H = oersteds (Oe)
N = Number of turns
I = Current (amperes)
ℓ = Mean Magnetic Path (cm)
A = Cross-sectional area (cm²)
f = frequency (hertz)
B_{pk} = Gauss (G)

For additional detail, specifications and charts see:

http://www.bytemark.com/products/IPCores_index.html

| Core Loss in mW/cm ³ (extrapolated data from high frequency testing) | | | | | | |
|---------------------------------------------------------------------------------|---------|---------|--------|--------|--------|--------|
| Frequency | 60 Hz | 1kHz | 10kHz | 50kHz | 100kHz | 500kHz |
| Condition | @ 5000G | @ 1500G | @ 500G | @ 225G | @ 140G | @ 50G |
| Value | 45 | 64 | 59 | 50 | 35 | 28 |

UNLESS OTHERWISE SPECIFIED
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M
ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
TOLERANCE INCHES:
.XXX=±.005 .XX=±.015 $\angle=±0^{\circ}30'$
TOLERANCE METRICS:
.XXX=±.127 .XX=±.38 $\angle=±0^{\circ}30'$
ANGLE PROJECTION
DO NOT SCALE DRAWING

| CODE IDENT | MFG. P/N | DESCRIPTION | ITEM NO. |
|---------------|-----------|---------------------------------------------------------------|---------------------------------------------------------|
| PARTS LIST | | | |
| AUTOCAD | X | www.coilws.com www.cwsbytemark.com | CWSBYTEMARK 353 West Grove Ave. Orange, CA. 92865 |
| SOLIDWORKS | | | |
| DRAWN | EO 3/7/13 | TITLE: Iron Powder Core Material Mix 8 or 8/90, Yellow/Red | |
| CHECKED | JL 3/7/13 | | |
| ENGR. | JL 3/7/13 | | |
| APPR. | JL 3/7/13 | | |
| SIZE DWG. NO. | | T20-8 or T20-8/90 | REV |
| SCALE | | | N/A |
| SHEET 1 OF 1 | | | |