F-50-43C

| | REVISION HISTORY | | | | | | | | |
|-----|------------------|--------------------|-------------|---------|-----|---------|--|--|--|
| REV | ECN | DESCRIPTION | SIGN & DATE | | | | | | |
| | | | BY | DATE | AP. | DATE | | | |
| A | | Production release | ЕО | 1/31/13 | JL | 1/31/13 | | | |
| | | | | | | | | | |


Features

NiZn ferrite with a range of 20 to 250 MHz for suppression of conducted EMI, that is used for inductive applications (ex: high frequency common-mode chokes)

Burnished to break sharp edges, can contain Parylene C coat at smaller diameters from length 9.5mm (0.375") or a uniform coating of thermo-set plastic for larger dimension (if part numbers ends with a C).

| Electrical Specifications | | | | | | | |
|-----------------------------------------|----------------------------------|-------------------------------|-----------------|-------|--|--|--|
| Item | Unit/Symbol | Condition | Value | Tol. | | | |
| A_{L} | nH/N ² | @ 10 KHz | 440 | ± 20% | | | |
| Le | cm | N/A | 2.95 | ± 10% | | | |
| Ae | cm ² | N/A | 0.129 | ± 10% | | | |
| Ve | cm ³ | N/A | 0.38 | ± 10% | | | |
| Initial Permeability | μ_0 | @ B < 10 gauss | 800 | ± 20% | | | |
| Temp. Coeff. Of initial Permeability | %, °C | 20 - 70 °C | 1.25 | Тур. | | | |
| Coercive Force | H _c | oersted | 0.45 | Тур. | | | |
| Residual Flux Density | Gauss, Br | N/A | 1300 | Тур. | | | |
| Flux Density | Gauss, B | Initial (B), oersted | 2900 | Тур. | | | |
| | Gauss, H | @ Field Strength (H), oersted | 10 | Тур. | | | |
| Curie temperature | °C | Tc | > 130 | Nom. | | | |
| Resistivity | Ω cm, ρ | @ Field Strength | 10 ⁵ | Тур. | | | |
| Loss Factor | 10^{-6} , tan δ / μ | Initial | 250 | Тур. | | | |
| | MHz | @ Frequency | 1 | Тур. | | | |

| Dimensional Tolerances | | | | | | |
|------------------------|-------|------|-------|------|--|--|
| | in | tol. | mm | tol. | | |
| Case | | | | | | |
| B (Outer Diameter) | 0.529 | Max | 13.45 | Max | | |
| A (Inner Diameter) | 0.254 | Min | 6.45 | Min | | |
| H (Height) | 0.213 | Max | 5.40 | Max | | |
| Weight 2.00 g | | | | | | |

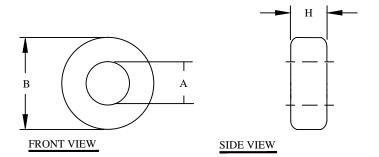

For additional detail, specifications and charts see:

http://www.bytemark.com/products/ferrite_matl.htm

| | CODE IDENT MFG | | 5. P/N | DESCRIPTI | | ON | ITEM NO. | |
|----------------------------------------------------------------------------|---------------------------------------------------------|----------|---------|---------------------------------------|-------------------------------------------------------|--------------------------------------------------------|-------------|----------|
| | | | | | PARTS | LIST | | |
| | AUTOC | AD WORKS | Х | www.coilws.com www.cwsbytemark.com | | CWSBYTEMARK 353 West Grove Ave. Orange, C. 92865 | | (|
| UNLESS OTHERWISE SPECIFIED | | GN | DATE | | | | | nge, CA. |
| DIMENSIONING AND TOLERANCE PER ANSI Y14.5M | TOLERANCE PER ANSI Y14.5M DRAWN FO 1/31/13 TITLE: | | | | | d Como | | |
| ALL DIMENSIONS ARE IN INCHES AND [MILIMETERS]. | CHECKED | JL | 1/31/13 | | Ferrite Toroid Core Material 43, NiZn, Plastic Coated | | | |
| TOLERANCE INCHES: .XXX=±.005 .XX=±.015 < √=±0'30' TOLERANCE METRICS: | ENGR. | JL | 1/31/13 | | | | | l REV |
| .XXX=±.127 .XX=±.38 <=±0'30' | APPR. | JL | 1/31/13 | B | F-5 | 0-43C | | A |
| DO NOT SCALE DRAWING | | | | SCALE | N/A | | SHEET 1 C | F 1 |

EP FORM0005 REV 3 10/01 CAD-FILE: