

The information contained in this drawing is the sole property of Coil Winding Specialist Inc (CWS). Any reproduction in part or whole without written permission of CWS is prohibited.

SB-101-73


Features

MnZn ferrite material with a range up 30 MHz for EMI frequencies suppression.

REVISION HISTORY					
REV	ECN	DESCRIPTION	SIGN & DATE		
			BY	DATE	AP. DATE
A		Production release	EO	10/8/13	JL 10/8/13

Electrical Specifications				
Item	Unit/Symbol	Condition	Value	Tol.
Typical Impedance	Ω	1 MHz	8.1	Typ.
Typical Impedance	Ω	5 MHz	19.5	Typ.
Typical Impedance	Ω	10 MHz	25	Typ.
Typical Impedance	Ω	25 MHz	35	Typ.
Typical Impedance	Ω	100 MHz	N/A	Typ.
Typical Impedance	Ω	250 MHz	N/A	Typ.
Initial Permeability	μ_0	@ B < 10 gauss	2500	Nom.
Temp. Coeff. Of initial Permeability	%, °C	20 - 70 °C	0.65	Typ.
Coercive Force	H _c	oersted	0.24	Typ.
Residual Flux Density	Gauss, B _r	N/A	1500	Typ.
Flux Density	Gauss, B	Initial (B), oersted	3900	Typ.
	Gauss, H	@ Field Strength (H), oersted	5	Typ.
Curie temperature	°C	T _c	> 160	Nom.
Resistivity	Ω cm, ρ	@ Field Strength	10 ²	Typ.
Loss Factor	10 ⁻⁶ , tan δ / μ	Initial	10	Typ.
	MHz	@ Frequency	0	Typ.

Dimensional Tolerances				
	in	tol.	mm	tol.
B (Outer Diameter)	0.138	± 0.008	3.50	± 0.20
A (Inner Diameter)	0.051	± 0.004	1.30	± 0.10
LH (Length)	0.128	± 0.009	3.25	± 0.25
Weight 0.13 g				

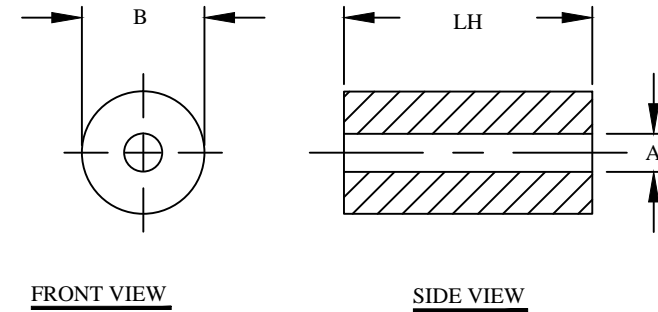

For additional detail, specifications and charts see:

http://www.bytemark.com/products/ferrite_matl.htm

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
		PARTS LIST	
AUTOCAD	X	www.coilws.com www.cwsbytemark.com	CWSBYTEMARK 353 West Grove Ave. Orange, CA. 92865
SOLIDWORKS			
DRAWN	EO 10/8/13	TITLE: Ferrite Shielding Bead Material 73, MnZn	
CHECKED	JL 10/8/13		
ENGR.	JL 10/8/13		
APPR.	JL 10/8/13	SIZE DWG. NO.	REV
		B SB-101-73	A
DO NOT SCALE DRAWING		SCALE	SHEET 1 OF 1
		N/A	